


UV LAMP
SPECTRAL OUTPUT

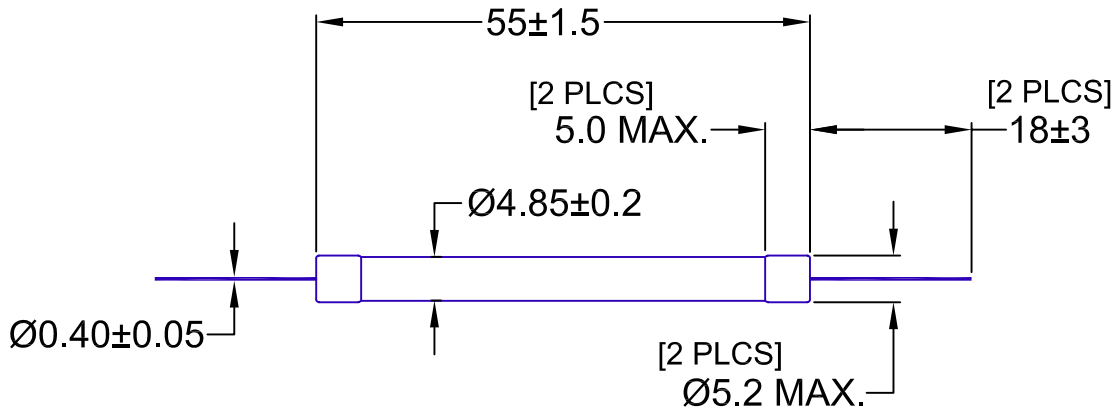


JKL PART NUMBER	LAMP WATTS	STARTING VOLTAGE VS (Vrms)	OPERATING VOLTAGE VL (Vrms)	OPERATING CURRENT IL (mArms)	OUTPUT mW/cm ² @1"	*RATED LIFE (HRS)
BF455-UV1	.78 TYP.	600 @ 0°C	156	5.0	.37	5,000 AVG.

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE OUTPUT BECOMES 50% OF THE INITIAL RATING.

ALL SPECIFICATIONS ARE TYPICAL WITH THE LAMP OPERATING AFTER STABILIZATION, AT AN AMBIENT TEMPERATURE OF 25°C.

METRIC



THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS

TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0.20
ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE
ULTRAVIOLET CCFL, BLACKLIGHT

DRAWN BY L. WENGSTROM
APPVD BY J.K. DATE 6/29/05

SIZE **A**
FSCM NO. **55335**
DRAWING NO. **BF455-UV1**

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE NONE
RELEASED DATE 6/29/05
REVISION DATE
REV. NO.
SHEET 1 OF 1

REV. NO. DESCRIPTION/ECO NUMBER
RELEASED TO CAD 6/29/05
APPVD DATE