


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	4/22/03

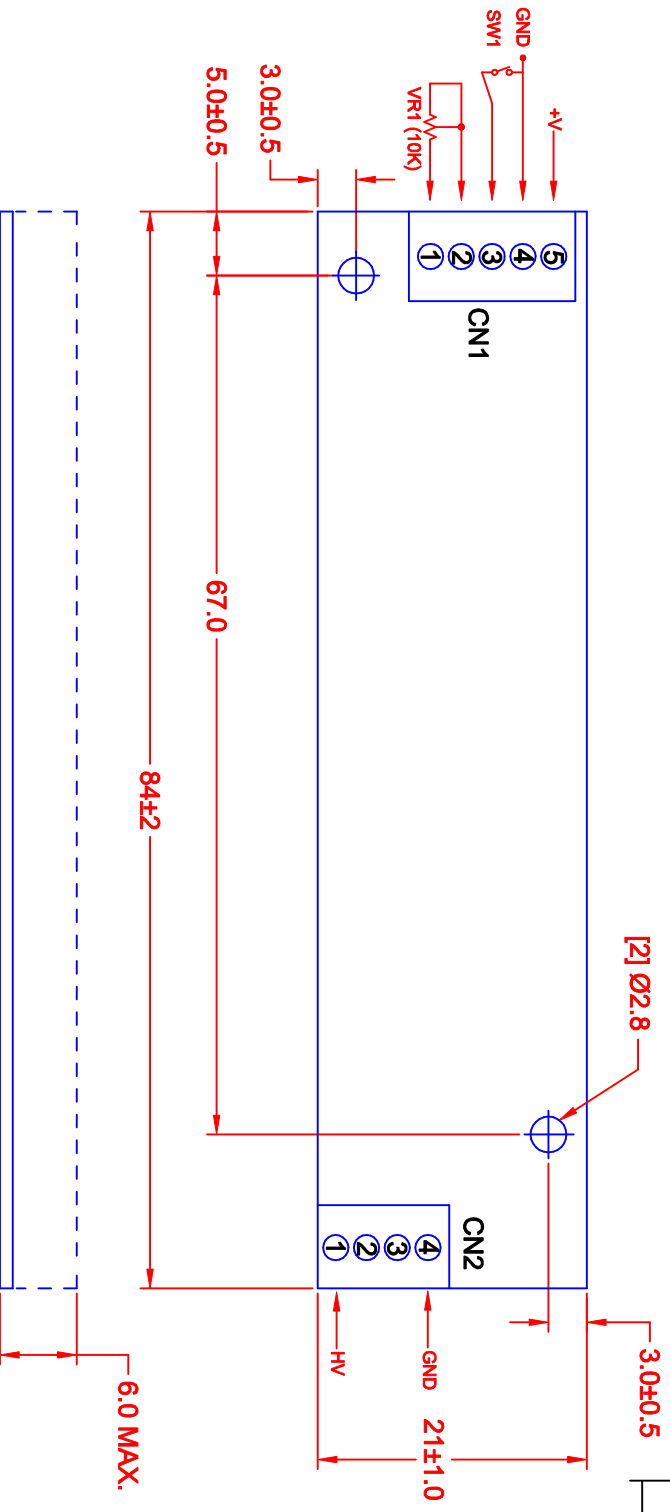

NO.	PIN NUMBER	MATING WIRE HARNESS
CN1	1	BXC-10546
	2	
	3	
	4	
	5	
CN2	1	BXC-10632
	2	
	3	
	4	

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	8.0	12.0	16.0
INPUT CURRENT: (mA)	---	210	---
OUTPUT VOLTAGE: (Vrms)	900	1000	---
OUTPUT CURRENT 2 X (mA)	4.0	5.0	6.0
OUTPUT FREQUENCY: (KHz)	27	37	47
DIMMING RANGE (OPTION)	40	---	100
OPERATING TEMP: (CELSIUS)	0	25	60

METRIC DIMENSIONS ARE IN MILLIMETERS
 TOLERANCE UNLESS OTHERWISE SPECIFIED
 1 PL +/- 0.2
 2 PL +/- 0
 ANGLE +/- 0

THIRD ANGLE PROJECTION

JKL COMPONENTS CORPORATION
TITLE DIMMING INVERTER

DRAWN BY L. WENGSTROM	APPRVD BY F.D.	DATE 4/22/03	SIZE A	FSCH NO. 55335	DRAWING NO. NO.	RELEASED DATE 4/22/03	REVISION DATE	REV. NO.	SHEET NO.
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			NONE	BXA-12562-5M					1 OF 1

NOTE:
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER.
 JKL WIRE HARNESS BXC-10546 AND BXC-10632 CAN BE ORDERED SEPARATELY.