


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	9/19/00
A	CHNG HARNS #S, DRW TO CAD	2/12/03

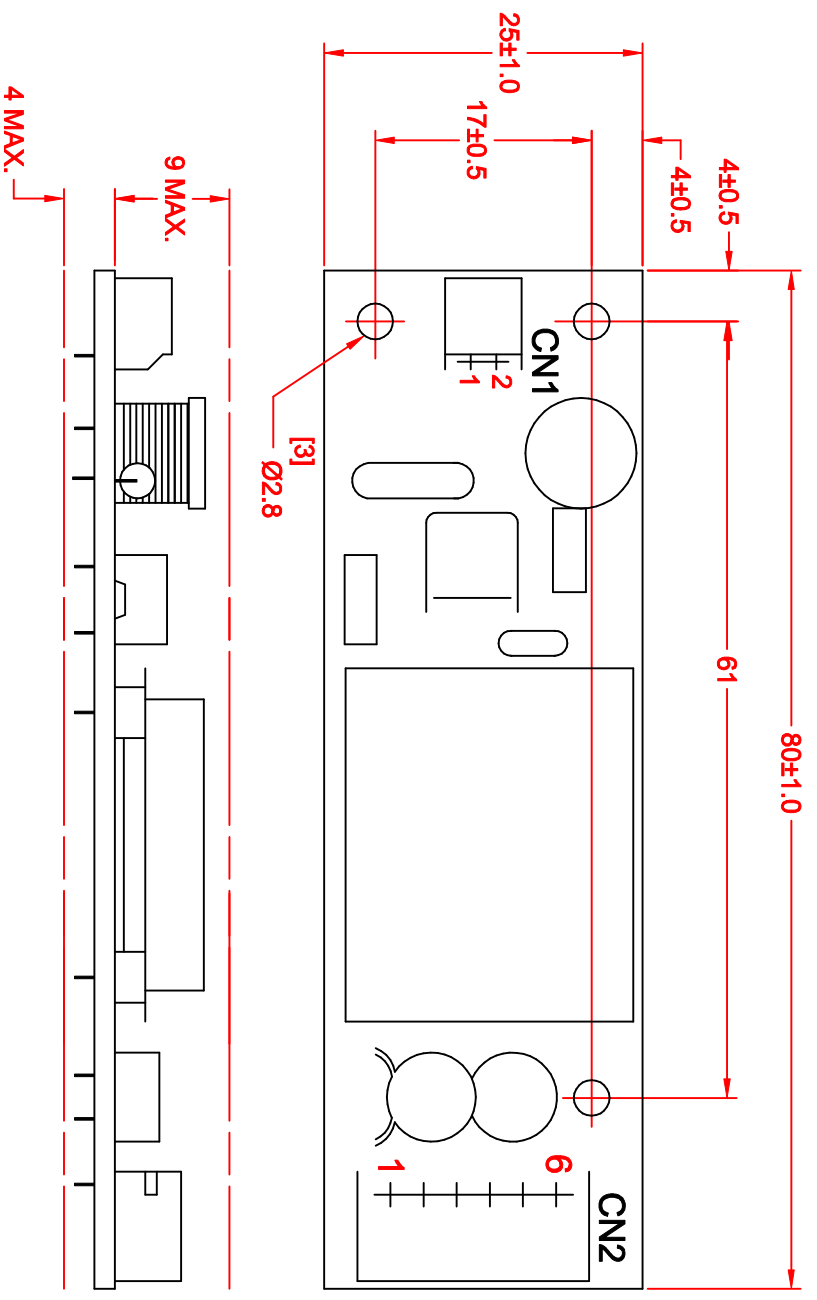

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1 INPUT +V	BXC-10574
	2 INPUT (GND)	
	1 OUTPUT (HV1)	BXC-10569
	2 NO CONNECTION	
	3 OUTPUT (HV2)	
CN2	4 NO CONNECTION	BXC-10569
	5	
	6 OUT LAMP GND 1 & 2	

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10574 AND BXC-10569 CAN BE ORDERED SEPARATELY.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	450	1000
OUTPUT VOLTAGE: (Vrms)	---	1200	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	5.5
OUTPUT FREQUENCY: (kHz)	25	35	45
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.3 2 PL +/- 0		JKL COMPONENTS CORPORATION	
TITLE 12 VOLT DUAL OUTPUT LOW PROFILE INVERTER			
DRAWN BY L. WENGSTROM	APP'D BY F. D.	DATE 2/12/03	SCALE NONE
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		REV. NO. A	SHEET OF
RELEASED DATE 9/19/00		REVISION DATE 2/12/03	
DRAWING NO. BXA-12571-5M		REV. NO. A	