


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE AND CANCEL	1/31/03
	BXA-12579/KIT & BXA-12579/INV	
<b>A</b>	ADD RoHS NOTE	3/15/06
<b>B</b>	CHNG OUTPUT HARNESS NO.	1/12/09

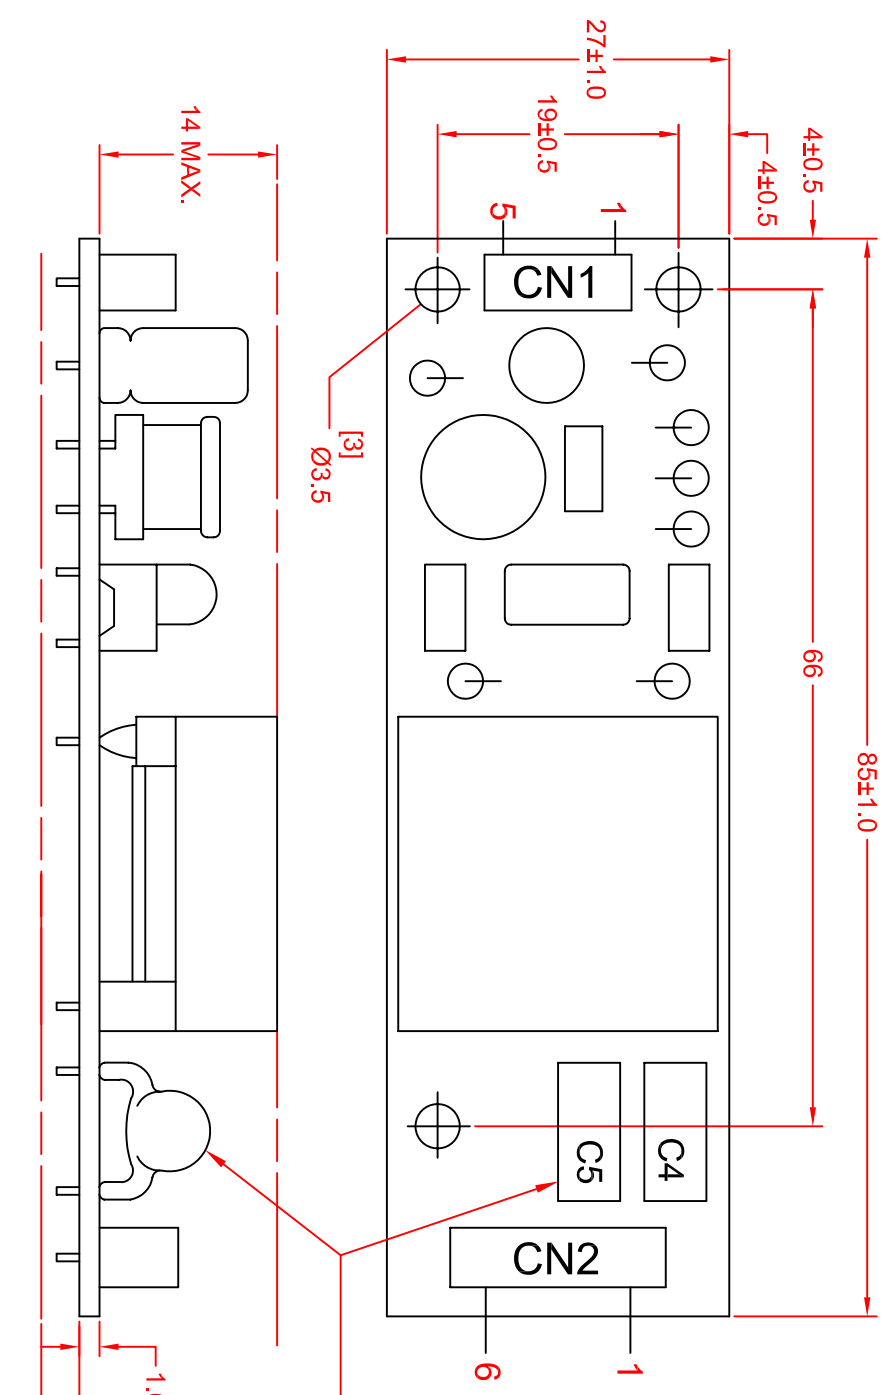

**NOTE:**  
**C4: 27PF, 3KV**  
**C5: 27PF, 3KV**

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	BXC-10605
	2	
	3	
	4	
	5	
CN2	1	BXC-10992 (Ref. MOD5)
	2	
	3	
	4	
	5	
	6	

**OPERATING SPECIFICATIONS**

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	550	1000
OUTPUT VOLTAGE: (Vrms)	---	1500	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	---
OUTPUT FREQUENCY: (KHz)	20	30	40
DIMMING RANGE (OPTION)	10% REF.	---	100% REF.
OPERATING TEMP: (CELSIUS)	0	25	50

\* JKL PART NO.: BXA-12579

	DIMENSIONS ARE IN MILLIMETERS			TITLE	
	TOLERANCE UNLESS OTHERWISE SPECIFIED			INVERTER WITH DIMMING OPTION	
	1 PL +/- 0.3	APPR/D BY	DATE	SIZE	FCGM NO.
THIRD ANGLE PROJECTION	2 PL +/-	L. WENGSTROM	1/12/09	<b>A</b>	<b>55335</b>
	ANGLE +/- 0	S.C.		SCALE	DRAWING NO.
				NONE	<b>BXA-12579</b>
- CAD DRAWING -			RELEASED	DATE	REVISION
MANUAL REVISIONS NOT PERMITTED			1/31/03	DATE	1/12/09
			REV. NO.	NO.	SHEET
			<b>B</b>		OF

**NOTE:**

MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10605 AND BXC-10992 CAN BE ORDERED SEPARATELY.

\*RoHS COMPLIANT