


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL PL-0705-02	7/12/07

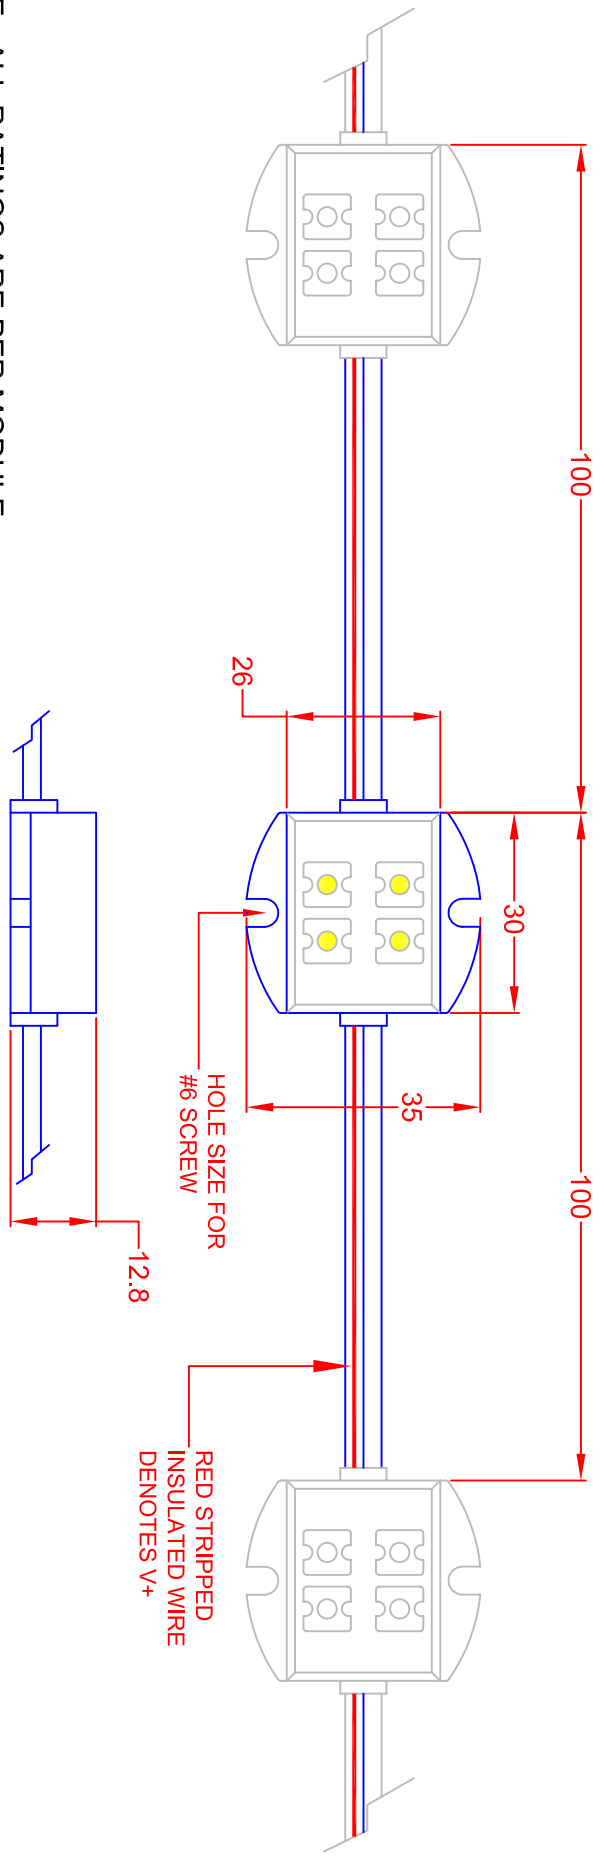

NOTE: ALL RATINGS ARE PER MODULE.

Absolute Maximum Ratings (Ta=25°C)	
Description	Max. Units
Continuous Forward Current	40 mA
Power	0.48 W
Operating Temperature Range	-25°C to +60°C
Storage Temperature Range	-40°C to +80°C

Electrical and Optical Characteristics (Ta=25°C)		
Description	Typical	Units
Input Voltage @ If = 40mA	12	Volts dc
Illumination @ 6"	300	LX
Color Coordinates	x = 0.29	y = 0.30

NOTE: STANDARD MOUNTING OPTIONS INCLUDE ADHESIVE BACKING AND MOUNTING TABS FOR A #6 SCREW (screws not included).

 METRIC	DIMENSIONS ARE IN MILLIMETERS		JKL COMPONENTS CORPORATION
	TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.25 2 PL +/- 0.25 ANGLE +/- 0		
DRAWN BY L. WENGSTROM	APP'D BY L.R.	DATE 7/12/07	TITLE SQUARE LED LIGHTING SYSTEM/REEL
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED	SCALE NONE	RELEASED DATE 7/12/07	FSCM NO. 55335
			DRAWING NO. ZMR-12113-12W
			REV. 1 OF 1