


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	7/20/01

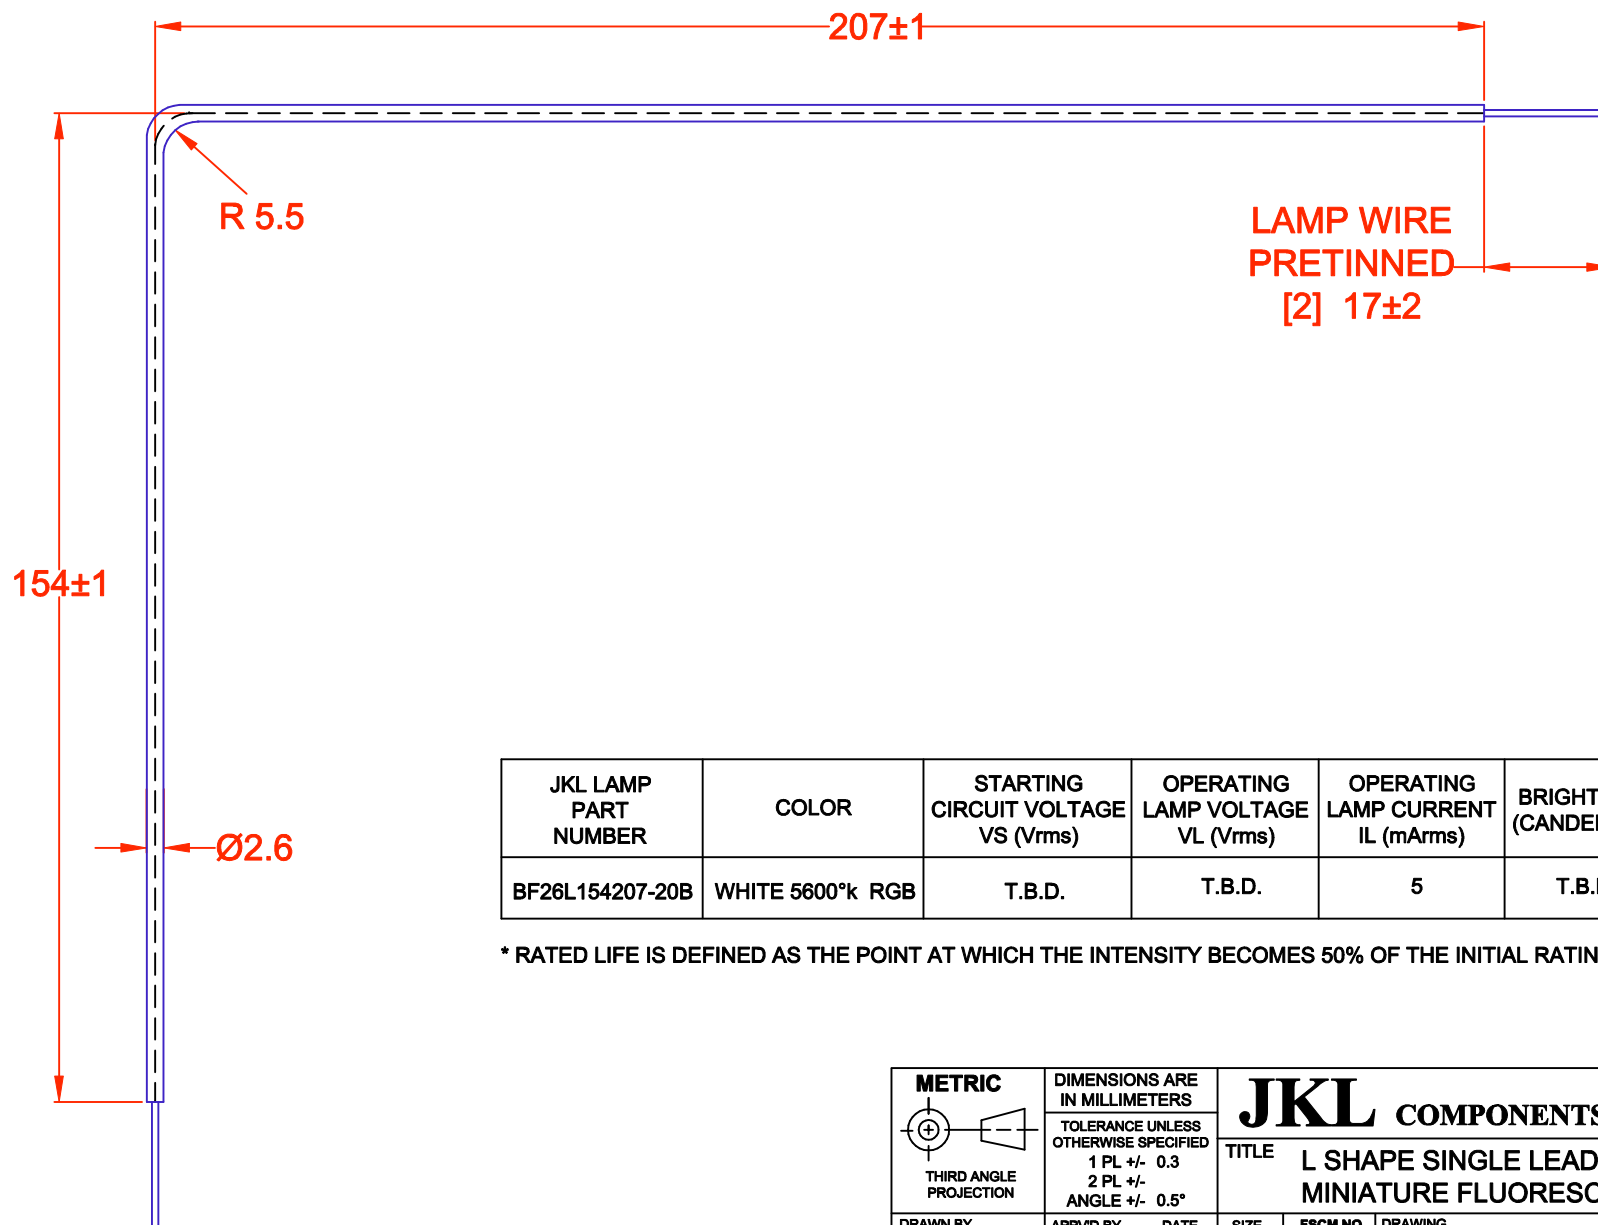

JKL LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF26L154207-20B	WHITE 5600°k RGB	T.B.D.	T.B.D.	5	T.B.D.	20,000

\* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

<b>METRIC</b>  THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.3 2 PL +/- 0.5°		<b>JKL COMPONENTS CORPORATION</b>			
	TITLE <b>L SHAPE SINGLE LEAD TIPLESS MINIATURE FLUORESCENT LAMP</b>		<b>BF26L154207-20B</b>			
DRAWN BY L. WENGSTROM	APPVD BY F.D.	DATE 7/20/01	SIZE <b>A</b>	FSCM NO. <b>55335</b>	DRAWING NO. <b>BF26L154207-20B</b>	
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE <b>NONE</b>	RELEASED DATE 7/20/01	REVISION DATE	REV. NO. <b>1 OF 1</b>