


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED & CANCEL P-0506-10	10/4/05
A	ELECTRICAL RATING CHANGES	2/6/06

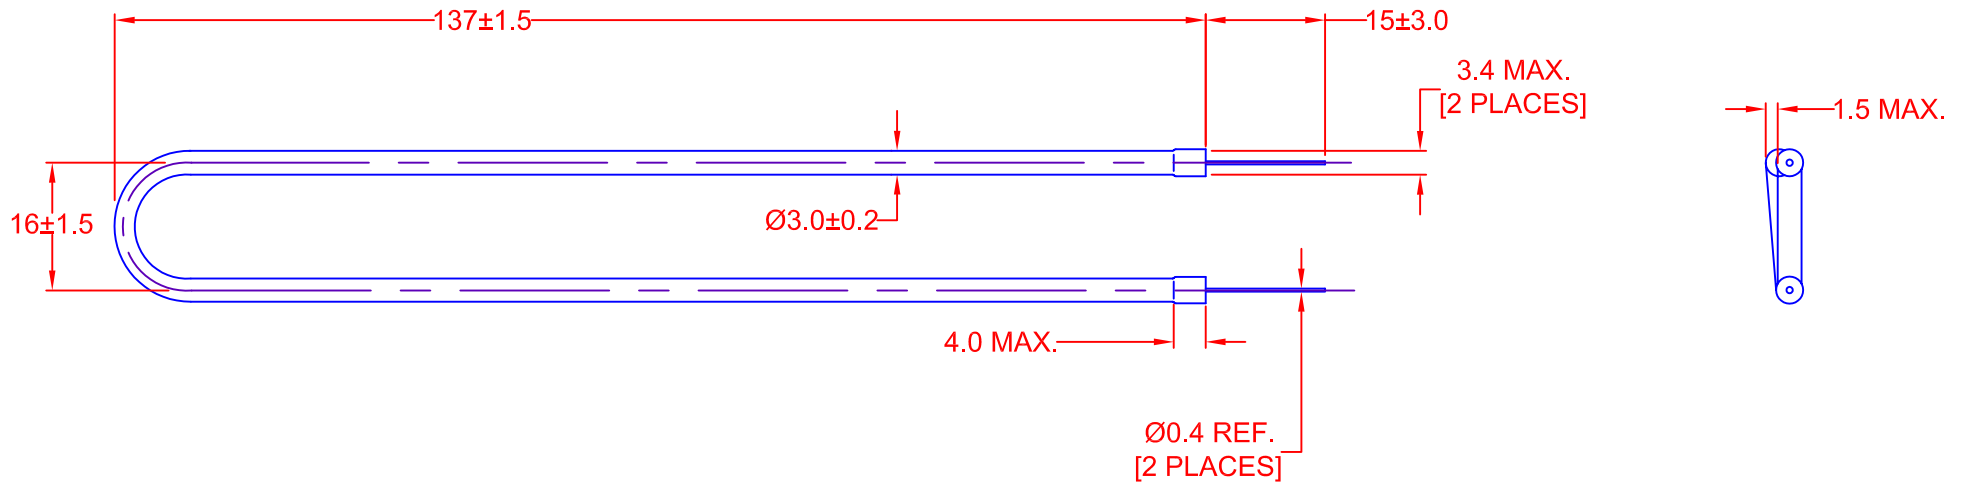

JKL PART NO. (REF.): BF3U16137-18B

COLOR PHOSPHOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS)
RGB WHITE 4,429° KELVIN x = .352 y = .339	1,300@0°	640	5 ± 1	28,000±10%	20,000 AVG.

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

METRIC THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/-	JKL COMPONENTS CORPORATION			
		TITLE CCFL U SHAPE COLD CATHODE FLUORESCENT LAMP			
DRAWN BY L. WENGSTROM	APPVD BY L.W.	DATE 2/6/06	SIZE A	FSCM NO. 55335	DRAWING NO. BF3U16137-18B
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 10/4/05	REVISION DATE 2/6/06
				REV. NO. A	SHEET 1 OF 1