


COB LED FLEX RIBBON

FEATURES:

- VOLTAGE 24VDC
- 5 METER REEL (500 COB LEDS)
- CAN BE CUT INTO 1" INCREMENTS
- 180 RADIANCE ANGLE
- PHOSPHOR COVER CREATES SOLID LIGHT LINE

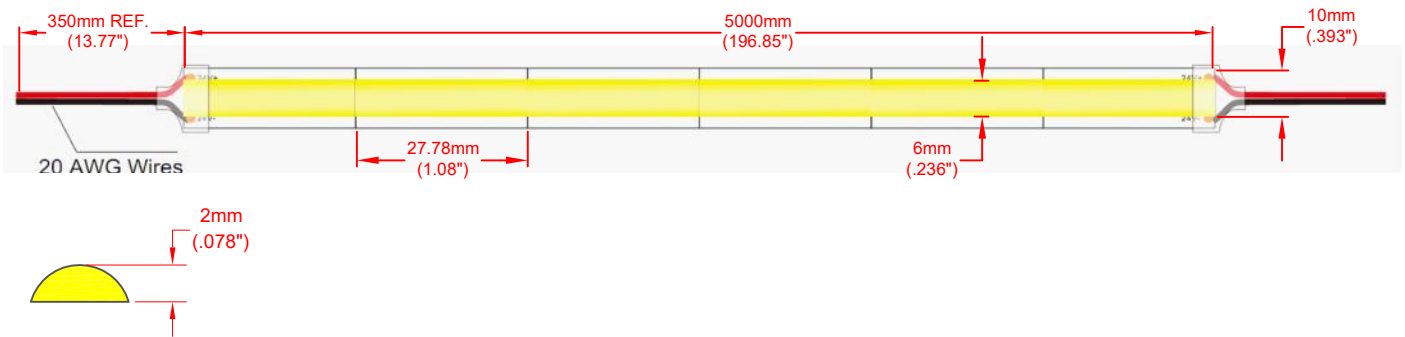

Maximum Ratings

PARAMETER	SYMBOL	RATING	UNIT
Electrostatic Discharge	ESD	800	V
Operating Temperature	T _{opr}	-20 ~ 50°C	
Storage Temperature	T _{stg}	-40 ~ 100°C	°C

JKL PART NUMBERS	VOLTAGE	CURRENT (mA)	WATTAGE	LUMENS	CCT COLOR
ZFS-COB-24WW	24 VDC	2900	70	1410	2700°K Warm White
ZFS-COB-24CW	24 VDC	2900	70	1600	6500°K Cool White

		 THIRD ANGLE PROJECTION		DIMENSIONS ARE IN mm (INCHES) TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-							
				TITLE		COB LED FLEX RIBBON					
RELEASED		7/12/19	APP'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.	ZFS-COB-24 MULTI			
			L. WENGSTROM	S.C.	7/12/19	A	55335				
REV. NO.	DESCRIPTION/ECO NUMBER	APP'VD DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET	
						NONE	7/12/19			1 OF 1	