DOUBLE WHITE LED FLEX RIBBON

Features

VOLTAGE: 12V DC CURRENT: 4200mA

LED VIEWING ANGLE (2 θ 1/2): 120°

STANDARD PACKAGING: 5 Meter Reel (300 LED's) OPTIONAL PACKAGING:

Individual 500mm Sections (30 LED's)
Order as ZFS-105000-DBW/XXSEC

Note: Individual Sections ARE NOT supplied

with insulated wire connection.





Maximum Ratings


Parameter	Symbol	Rating	Unit
Electrostatic Discharge	ESD	800	٧
Operating Temperature	Topr	-0~+40	°C
Storage Temperature	Tstg	-40~+100	°C

Accessories

ZCTR-05: RF Wireless Touch LED Remote Controller

Electro-Optical Characteristics (Ta = 25° C)

	Number	Input					Lumen
Color	of LED's	Voltage	Power	Current	Radiance	CCT	Flux
	per Reel	(V DC)	(W)	(A)	Angle	(K)	(lm)
Cool White	300	12	25.0	2.1	120°	6475	1740
Warm White	300	12	25.0	2.1	120°	3284	1620

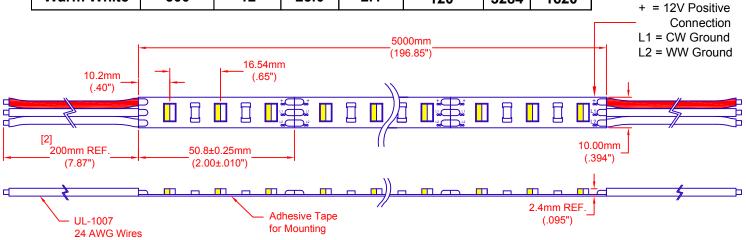



Note: Please refer to JKL Application Sheet JKL- AS-ZFS-105000-DBW LED FLEX for Installation and Power Recommendations.

BIOGRANGE GENOTIVE BEVIOLO											
		METRIC DIMENSIONS ARE		TT/T							
			I WILLIAM	IN mm (INCl	HES)	COMPONENTS CORPORA			DODAT	MOI	
			 (1) 	TOLERANCE UI	NLESS		74 84	COMPO	NEN 15 COI	KPUKAI	IUN
				OTHERWISE SPE	ECIFIED	TITLE					
			, T		REF.				V LED FLEX	DIDDO	AI.
			THIRD ANGLE		REF.		DOUBL		V LED FLEX	KIDDOI	. V
В	ADD UL SYMBOL	3/31/15	PROJECTION	ANGLE +/-							
Δ	ADD TAPE SYMBOL NOTE	10/9/14			DATE	SIZE		DRAWING	700 105000 1	אומכ	
$\overline{}$			L. WENGSTROM S.C. 3/31/15 A 55335 NO. 2FS-105		ZFS-105000-I	00-DBM					
	RELEASED	3/18/14	0.10.0	D 414//110		SCALE		RELEASED	REVISION	DEV -	SHEET
REV.	DESCRIPTION/ECO	APPV'D	- CAD DRAWING -		SUALE				REV. B	Janeer 1	
NO.	NUMBER	DATE	MANUAL REVISIONS NOT PERMITTED			NONE	DATE 3/18/14	4 5/15 3/3 1/13	יאן א	1 OF 1	
		•	•			•			•	•	