


LED FLEX RIBBON, 3V

FEATURES:

- 3 Vdc LED Flex Ribbon
- Single LED per section with cut lines and solder pads
- 7000°K ± 500° K Cool White
- LED Package: 2.8mm x 3.5mm
- LED Count: 30 LEDs per strand
- No Resistors - constant current operation
- CRI >80
- 120° Viewing Angle

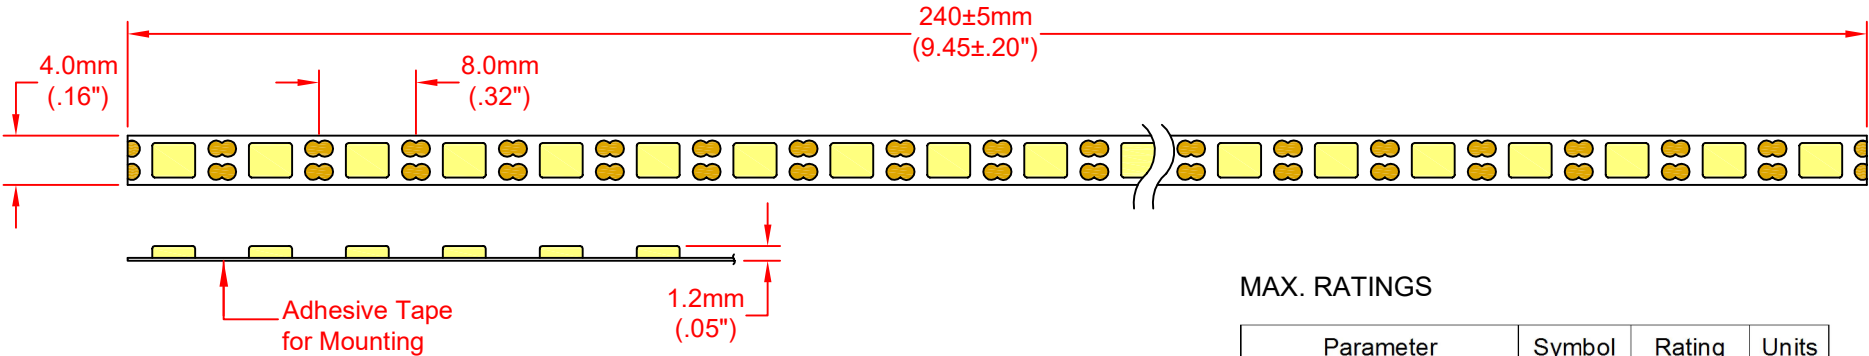

MAX. RATINGS

Parameter	Symbol	Rating	Units
Max. Drive Current	LED	150	mA
Max. Reverse Voltage	DC	5	V
Electrostatic Discharge	ESD	2000	V
Operating Temperature	Topr	-40~+105	°C
Storage Temperature	Tstg	-40~+105	°C

ELECTRO-OPTICAL CHARACTERISTICS

JKL Part Number	Color	Number of LEDs	Input Voltage (TYP.)	Input Voltage (MAX.)	CCT	Lumen Flux (lm)
ZFS-4240-CW	Cool White	30	3.0	3.3	7000	9-13 Per LED

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	ADD FEATURES, MAX RATINGS, NEW DRW	7/14/17
	RELEASED & CANCEL PL-1608-02	9/24/16

<p>METRIC THIRD ANGLE PROJECTION</p>	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- REF.	JKL COMPONENTS CORPORATION			
	TITLE 3 VOLT LED FLEX RIBBON				
DRAWN BY L. WENGSTROM	APPV'D BY L.R.	DATE 7/14/17	SIZE A	FSCM NO. 55335	DRAWING NO. ZFS-4240-CW
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NOT TO SCALE	RELEASED DATE 9/24/16	REVISION DATE 7/14/17
				REV. NO. A	SHEET 1 OF 1