


# LED FLEX RIBBON

## FEATURES:

- 12 Vdc LED Flex Ribbon
- 5600°K ± 500° K Cool White
- LED Package: 2.8mm x 3.5mm
- LED Count: 90 LEDs per meter
- 3 LEDs per section (33mm) with solder pads
- Double-sided tape on backside of Flex Ribbon
- LED Part No. LA-B2835L7E23-3E1-0037
- Operating Temperature Range -20°C to +60°C
- LED Die Vendor Sanan Optoelectronics

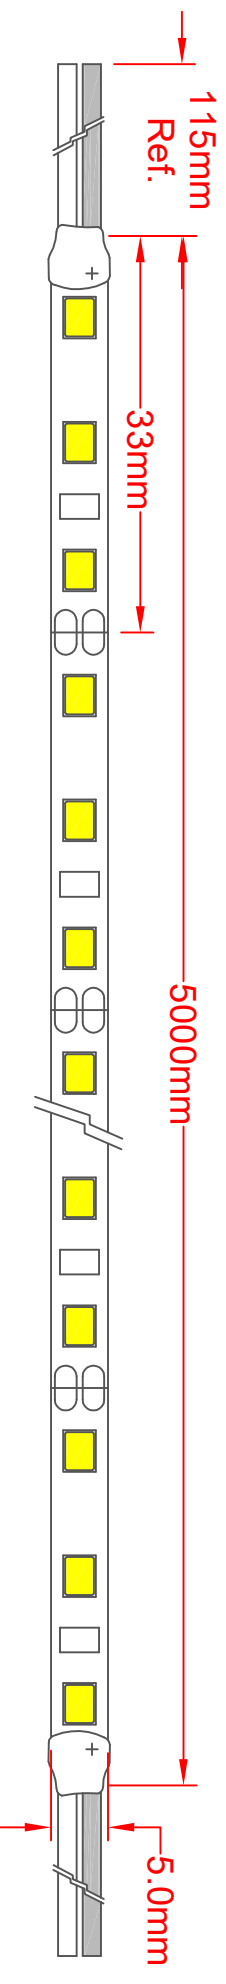

## ELECTRO-OPTICAL CHARACTERISTICS

JKL Part Number	Color	Number of LEDs	Input Voltage (TYP.)	Input Voltage (MAX.)	CCT	Lumen Flux (lm)
ZFS-55000-CW	Cool White	450	12	13.2	5600	13-19 Per LED

<b>METRIC</b> THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- REF.	
<b>JKL COMPONENTS CORPORATION</b> TITLE <b>12 VOLT LED FLEX RIBBON</b>		DRAWN BY <b>L. WENGSTROM</b>	APPR'D BY S.C.
DATE <b>12/19/18</b>	SIZE <b>A</b>	FSCM NO. <b>55335</b>	DRAWING NO. <b>ZFS-55000-CW</b>
SCALE NOT TO SCALE	RELEASED DATE <b>2/22/17</b>	REVISION DATE <b>12/19/18</b>	REV. NO. <b>B</b>
SHEET <b>1 OF 1</b>	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		

REV. NO.	DESCRIPTION/ECO NUMBER	APPVD DATE
<b>B</b>	LUMEN FLUX CHANGE TO 13-19 PER LED	12/19/18
<b>A</b>	CHANGE PART NO. ADDED FEATURES	3/9/17
	RELEASED	2/22/17