


LED FLEX RIBBON

FEATURES:

- 12 Vdc LED Flex Ribbon
- 5600°K ± 500° K Cool White
- LED Package: 2.8mm x 3.5mm
- LED Count: 90 LEDs per meter
- 3 LEDs per section (33mm) with solder pads
- Double-sided tape on backside of Flex Ribbon
- LED Part No. LA-B2835L7E23-3E1-0037
- Operating Temperature Range -20°C to +60°C
- LED Die Vendor Sanan Optoelectronics

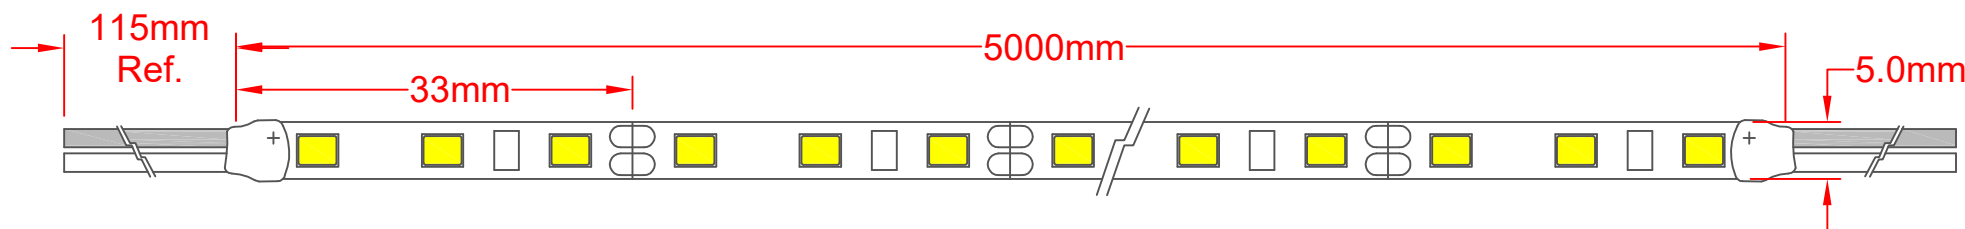

ELECTRO-OPTICAL CHARACTERISTICS

JKL Part Number	Color	Number of LEDs	Input Voltage (TYP.)	Input Voltage (MAX.)	CCT	Lumen Flux (lm)
ZFS-55000-CW	Cool White	450	12	13.2	5600	13-19 Per LED

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
B	LUMEN FLUX CHANGE TO 13-19 PER LED	12/19/18
A	CHANGE PART NO. ADDED FEATURES	3/9/17
	RELEASED	2/22/17

<p>THIRD ANGLE PROJECTION</p>	<p>METRIC</p> <p>DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- REF.</p> <p>2 PL +/- REF.</p> <p>ANGLE +/- REF.</p>	<p>JKL COMPONENTS CORPORATION</p>			
	<p>TITLE</p> <p>12 VOLT LED FLEX RIBBON</p>				
<p>DRAWN BY</p> <p>L. WENGSTROM</p>	<p>APPV'D BY</p> <p>S.C.</p>	<p>DATE</p> <p>12/19/18</p>	<p>SIZE</p> <p>A</p>	<p>FSCM NO.</p> <p>55335</p>	<p>DRAWING NO.</p> <p>ZFS-55000-CW</p>
<p>- CAD DRAWING -</p> <p>MANUAL REVISIONS NOT PERMITTED</p>			<p>SCALE</p> <p>NOT TO SCALE</p>	<p>RELEASED DATE</p> <p>2/22/17</p>	<p>REVISION DATE</p> <p>12/19/18</p>
				<p>REV. NO.</p> <p>B</p>	<p>SHEET</p> <p>1 OF 1</p>