


FEATURES

- 24 VDC
- 36 WATTS
- 50 Lensed LEDs per sheet
- SHEET SIZE: 18.9" x 9.4"
- >90 CRI
- IP20 Water Resistance
- 3M Adhesive Backing


SHALLOW BOX CUTTABLE LED FLEX SHEET




Each LED is 0.72 Watts
Cut Flexible LED circuit to desired shape

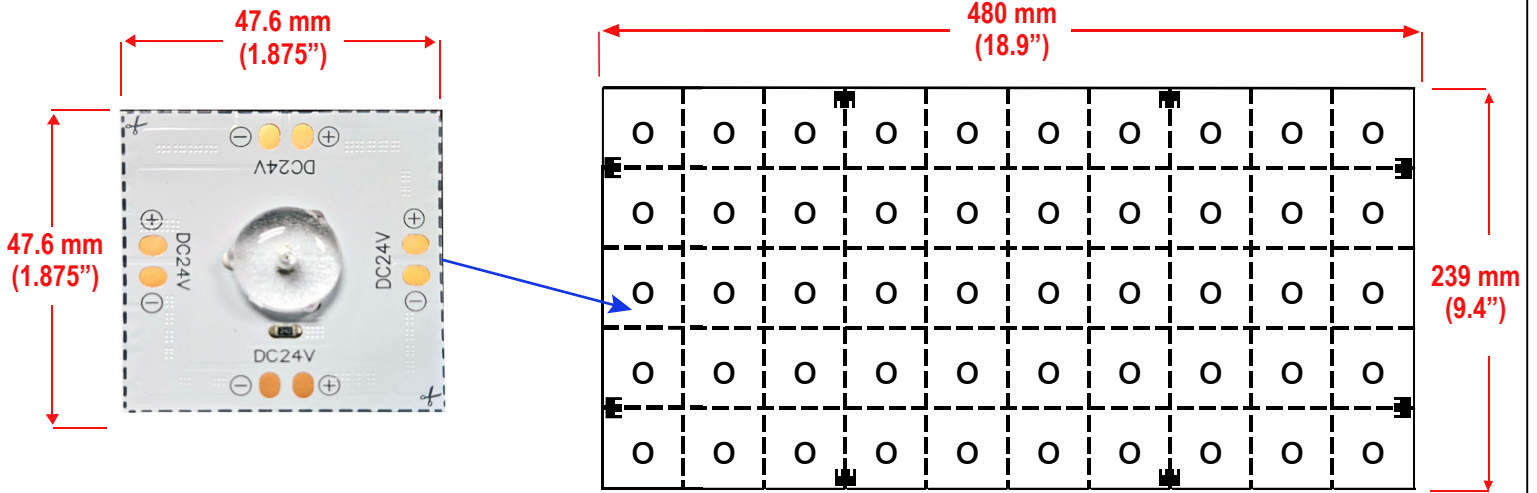

OPTIONAL ACCESSORIES:

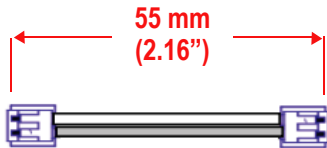

ZFSS-288-J Joiner Connector

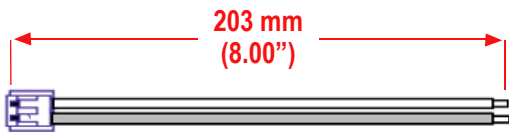

ZFSS-288-I Input Connector

Absolute Maximum Rating at (Ta=25° C)

Parameter	Symbol	Abs Max Rating
Forward Current	IF	1.4 A
Power Dissipation	PD	36 W
Operating Temperature	Topr	-20~+60°C
Storage Temperature	Tstg	-30~+70°C

Electro-Optical Characteristics (Ta=25° C)

JKL Part Number	Color	LED Count	Input Voltage	Wattage (W)	Radiance Angle	CCT Kelvin	Lumens Flux (lm)	Max Series Connection
ZFSL-50-CW	Cool White	50	24VDC	36	160°	6250° K	3200	4 full sheets
ZFSL-50-WW	Warm White	50	24VDC	36	160°	3100° K	3050	4 full sheets

<p>METRIC</p>		<p>DIMENSIONS ARE IN mm (INCHES)</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- REF.</p> <p>2 PL +/- REF.</p> <p>ANGLE +/-</p>		<p>JKL COMPONENTS CORPORATION</p>										
<p>THIRD ANGLE PROJECTION</p>		<p>DRAWN BY: S Newton</p>		<p>APP'VD BY: JV</p>		<p>DATE: 3/20/24</p>		<p>SIZE: A</p>		<p>FSCM NO.: 55335</p>		<p>DRAWING NO.: ZFSL-50</p>		
<p>Released</p>		<p>3/20/24</p>		<p>SCALE: NONE</p>		<p>RELEASED DATE: 3/20/24</p>		<p>REVISION:</p>		<p>REV. NO.:</p>		<p>SHEET 1 OF 1</p>		
REV. NO.	DESCRIPTION/ECO NUMBER	APP'VD DATE												