

U-FRAME CUTTABLE LED FLEX SHEET


FEATURES

VOLTAGE: 24V DC
 CURRENT: 2.5A
 WATTAGE: 60W

288 LEDS PER SHEET
 SHEET SIZE: 19" X 9"
 3M ADHESIVE BACKING
 >95 CRI
 WATER RESISTANCE: IP20



CUT TO DESIRED SHAPE--EACH LED IS 208W / 8.66mA.

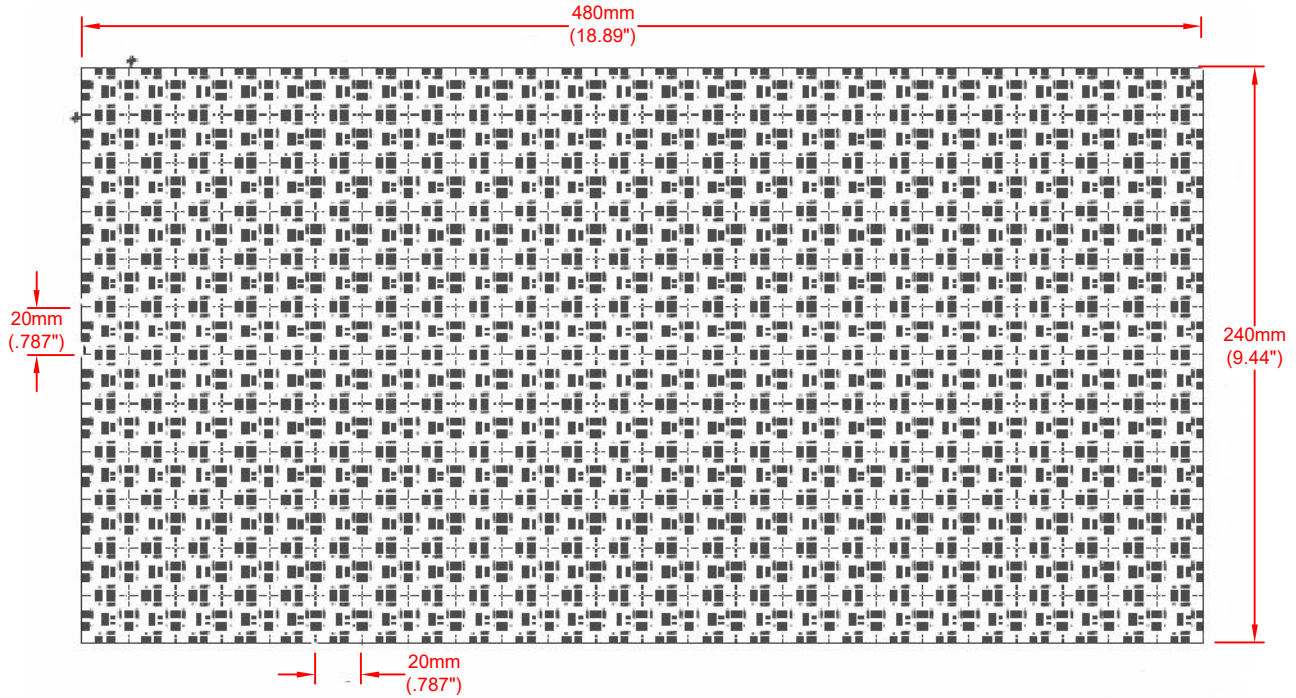

Electro-Optical Characteristics (Ta=25°C)

JKL Part Number	Color	LED Count	Input Voltage	Wattage (W)	Radiance Angle	CCT Kelvin	Lumens) Flux (lm)	Max Series Connection
ZFSS-288-WW	Warm White	288	24V DC	60	120 Degree	3000-3200K	6000-6100	5 Full Sheets or 15A
ZFSS-288-CW	Cool White	288	24V DC	60	120 Degree	6000-6500K	6200-6300	5 Full Sheets or 15A

Absolute Maximum Rating at (Ta = 25°C)

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	2.5A	A
Power Dissipation	PD	60	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+60	°C
Storage Temperature	Tstg	-30~+70	°C

ATTENTION



OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

<p>METRIC</p> <p>THIRD ANGLE PROJECTION</p>	<p>DIMENSIONS ARE IN mm & (INCHES)</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- REF.</p> <p>2 PL +/-</p> <p>ANGLE +/-</p>	<p>JKL COMPONENTS CORPORATION</p>				
		<p>TITLE</p> <p>24V LED FLEX SHEET</p>				
<p>DRAWN BY</p> <p>L. WENGSTROM</p>	<p>APPV'D BY DATE</p> <p>S.C. 7/30/18</p>	<p>SIZE</p> <p>A</p>	<p>FSCM NO.</p> <p>55335</p>	<p>DRAWING NO.</p> <p>ZFSS-MULTI</p>		
<p>- CAD DRAWING -</p> <p>MANUAL REVISIONS NOT PERMITTED</p>		<p>SCALE</p> <p>NONE</p>	<p>RELEASED DATE</p> <p>7/28/18</p>	<p>REVISION DATE</p>	<p>REV. NO.</p>	<p>SHEET</p> <p>1 of 1</p>

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
	RELEASE	7/28/18