

# U-FRAME CUTTABLE LED FLEX SHEET

## FEATURES

VOLTAGE: 24V DC

CURRENT: 2.5A

WATTAGE: 60W

288 LEDS PER SHEET

SHEET SIZE: 19" X 9"


3M ADHESIVE BACKING

>95 CRI

WATER RESISTANCE: IP20



CUT TO DESIRED SHAPE--EACH LED IS 208W / 8.66mA.

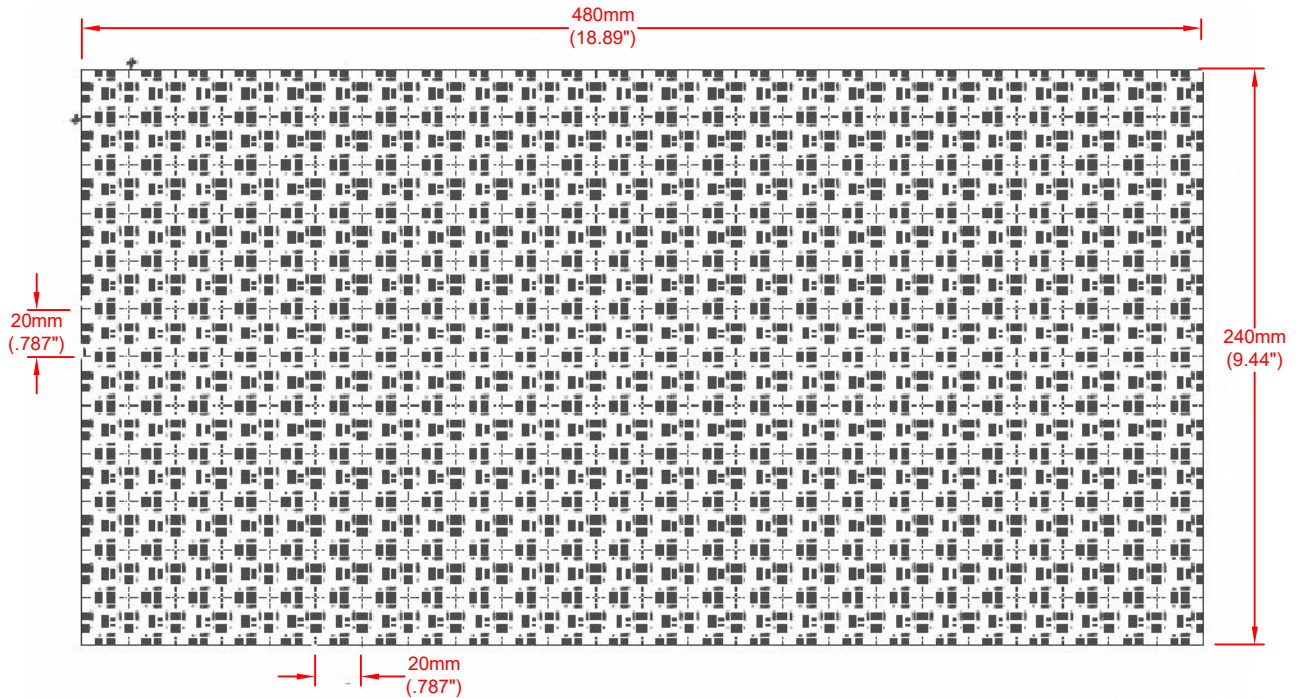

### Electro-Optical Characteristics (Ta=25°C)

JKL Part Number	Color	LED Count	Input Voltage	Wattage (W)	Radiance Angle	CCT Kelvin	Lumens ) Flux (lm)	Max Series Connection
ZFSS-288-WW	Warm White	288	24V DC	60	120 Degree	3000-3200K	6000-6100	5 Full Sheets or 15A
ZFSS-288-CW	Cool White	288	24V DC	60	120 Degree	6000-6500K	6200-6300	5 Full Sheets or 15A


### Absolute Maximum Rating at (Ta = 25°C)

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	2.5A	A
Power Dissipation	PD	60	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+60	°C
Storage Temperature	Tstg	-30~+70	°C

### ATTENTION



OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

<b>METRIC</b>  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN mm & (INCHES) TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/-		<b>JKL COMPONENTS CORPORATION</b>				
DRAWN BY		APPV'D BY DATE		SIZE	FSCM NO.	DRAWING NO.		
L. WENGSTROM		S.C. 7/30/18		<b>A</b>	<b>55335</b>	<b>ZFSS-MULTI</b>		
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED				SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
				NONE	7/28/18			1 of 1

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
RELEASE		7/28/18