
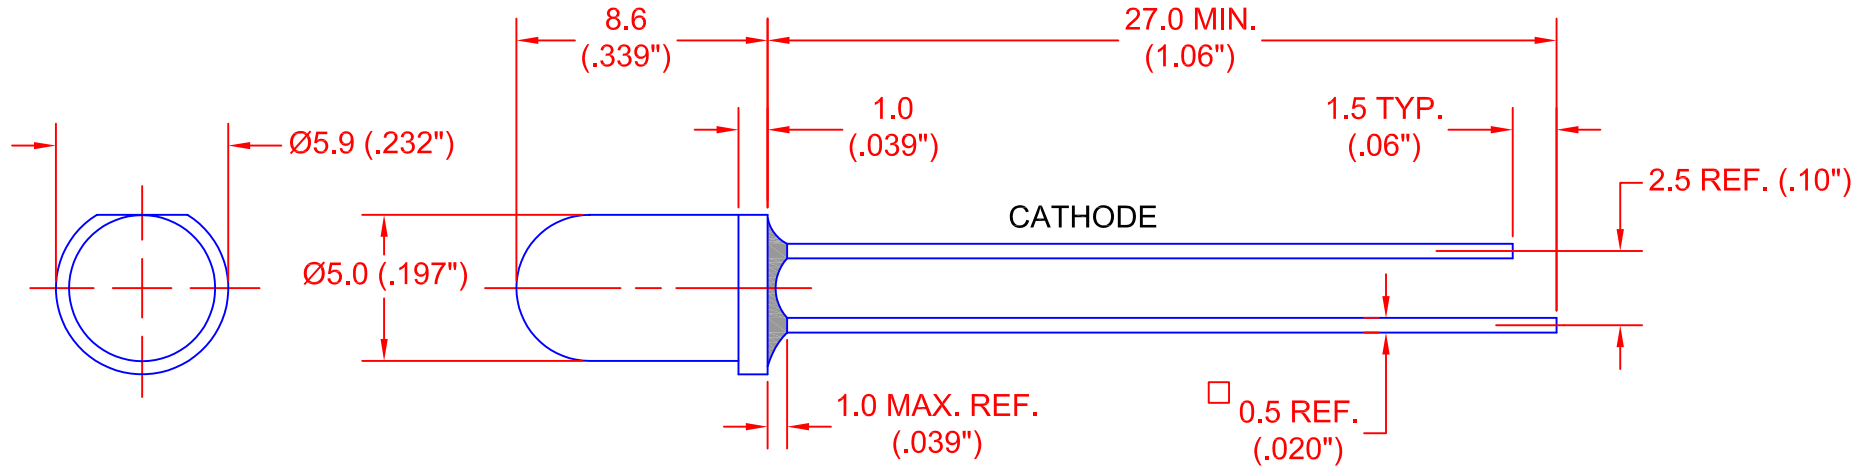


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED TO CAD	3/10/10



JKL PART NUMBER	LED SOURCE (DICE)	LENS TYPE	LUMINOUS INTENSITY mcd @ 2mA		VIEWING ANGLE
			MIN.	TYP.	
ZL-221RH	HIGH EFFICIENCY RED GaAsP/GaP	DIFFUSED	0.6	1.8	120°
ZL-221G	GREEN GaP	DIFFUSED	0.6	1.8	120°

NOTE: ELECTRO STATIC DISCHARGE PROTECTION REQUIRED WHEN HANDLING DEVICES.

<b>METRIC</b>  THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS (INCHES)	<b>JKL COMPONENTS CORPORATION</b>			
	TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.25mm (±0.01)				
DRAWN BY L. WENGSTROM	APPV'D BY DATE L.W. 3/10/10	SIZE <b>A</b>	FSCM NO. <b>55335</b>	DRAWING NO. <b>ZL-22</b>	
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE NONE	RELEASED DATE 3/10/10	REVISION DATE	REV. NO. SHEET <b>1 OF 1</b>