
REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/2/01
A	ADD NOTES	6/15/01
B	1816 CHANGE C-2V TO C-2F	11/16/07
C	1816 VENDOR CHNG FILAMENT	7/5/11
D	BASE DIMENSION CHANGE	2//6/14

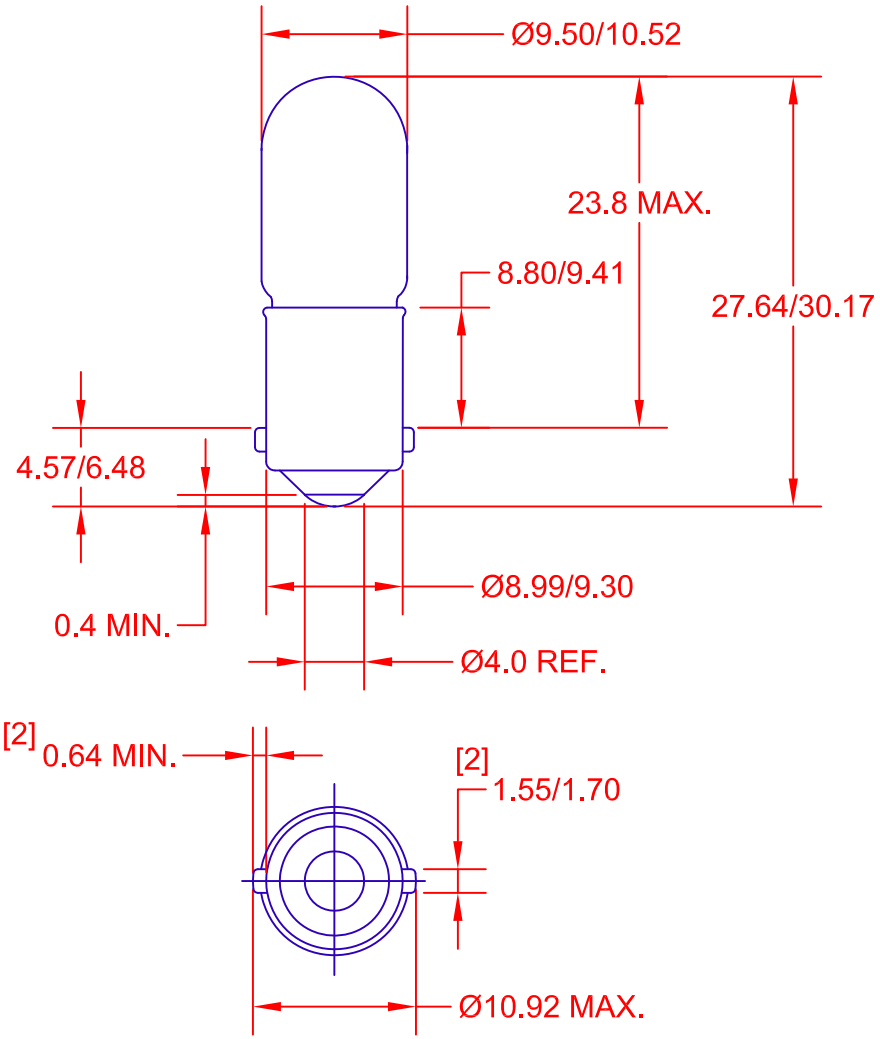

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	MSCP ±25%	LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
49	2.0	.060	.04	0.50	1,000	S-2
1436	2.5	.300	.30	3.77	1,000	C-2R
43	2.5	.500	.50	6.29	3,000	C-2R
1490	3.2	.160	.20	2.51	3,000	C-2R
45	3.2	.350	.50	6.29	3,000	C-2R
1850	5.0	.090	.25	3.14	1,500	C-2R
316	6.0	.700	3.40	42.74	500	C-2R
755	6.3	.150	.33	4.15	20,000	C-2V
47	6.3	.150	.52	6.54	3,000	C-2R
1866	6.3	.250	.65	8.17	10,000	C-2R
44	6.3	.250	.90	11.31	3,000	C-2R
1888	7.0	.500	2.00	25.14	3,000	C-2R
1816	13.0	.330	3.00	37.71	1,000	C-2V
756	14.0	.080	.31	3.90	15,000	C-2F
1815	14.0	.200	1.40	17.60	3,000	C-2V
1891	14.0	.240	2.00	25.14	500	C-2F
*256	14.0	.270	1.60	20.11	500	C-2R
1893	14.0	.330	2.00	25.14	7,500	C-2F
1813	14.4	.100	.86	10.81	1,000	C-2V
1892	14.4	.120	.75	9.43	1,000	C-2F
1818	24.0	.170	3.30	41.48	250	C-2F
1819	28.0	.040	.34	4.27	2,500	C-2F
1829	28.0	.070	1.00	12.57	1,000	C-2F
757	28.0	.080	.62	7.79	15,000	C-2F
1820	28.0	.100	1.60	20.11	1,000	C-2F
1864	28.0	.170	3.00	37.71	1,500	C-2F
313	28.0	.170	3.50	44.00	500	C-2F
1873	28.0	.200	3.00	37.71	7,000	C-2F
1822	36.0	.100	2.10	26.40	1,000	C-2F
1828	37.5	.050	.65	8.17	3,000	C-2F
1835	55.0	.050	1.10	13.83	5,000	C-2F
RB22	130.0	.027	.600	7.54	5,000	C-5

*FLASHER TYPE LAMP

NOTES:
1. FLASHER TYPE LAMPS HAVE A BI-METAL STRIP ADDED TOTHE FILAMENT MOUNT TO PROVIDE THE FLASHING. HEAT FROM THE FILAMENT CAUSES THIS STRIP TO BEND AWAY FROM THE LEAD WIRE, BREAKING THE CIRCUIT. AS THE BI-METAL STRIP COOLS IT RETURNS TO IT'S ORIGINAL POSITION AGAINST THE LEAD WIRE AND THE LAMP LIGHTS.

2. FLASHER TYPE LAMPS ARE DESIGNED TO RANDOMLYBLINK AT THE APPROX-IMATE RATE OF 50-150 FLASHERS PER MINUTE A NORMAL ROOM TEMPER-ATURE, SOME WILL BE OUTSIDE THIS RANGE. AS AMBIENT TEMPERATURE AND/OR INPUT VOLTAGE CHANGES, THE FLASH RATE MAY VARY CONSIDERABLY.

METRIC THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0	JKL COMPONENTS CORPORATION TITLE: T-3 1/4 MINIATURE SINGLE CONTACT BAYONET					
DRAWN BY: L. WENGSTROM	APPV'D BY: L.R.	DATE: 2/6/14	SIZE: A	FSCM NO.: 55335	DRAWING NO.: BAYONET SINGLE CONTACT T-3 1/4		
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE: NONE	RELEASED DATE: 3/2/01	REVISION DATE: 2/6/14	REV. NO.: D	SHEET: 1 OF 1