

COB LED FLEX RIBBON

FEATURES:

- VOLTAGE 24VDC
- 5 METER REEL (512 COB LEDS)
- CAN BE CUT INTO 1” INCREMENTS
- 180 RADIANCE ANGLE
- PHOSPHOR COVER CREATES SOLID LIGHT LINE



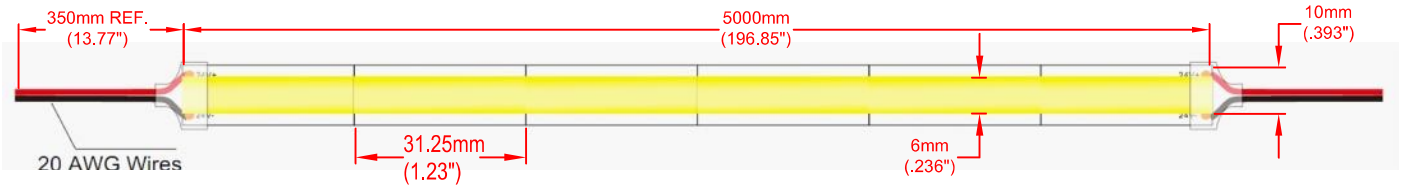



Maximum Ratings

PARAMETER	SYMBOL	RATING	UNIT
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20 ~ 50°C	
Storage Temperature	Tstg	-40 ~ 100°C	°C

JKL Part Numbers	VOLTAGE	CURRENT (mA)	WATTAGE	LUMENS	CCT COLOR
ZFS-COB31-24WW	24 VDC	2900	70	1422	2700° Warm White
ZFS-COB31-24CW	24 VDC	2900	70	1670	6500° Cool White

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
	RELEASED	2/27/20

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN mm (INCHES)
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- REF.
2 PL +/- REF.
ANGLE +/-

JKL COMPONENTS CORPORATION

TITLE: COB LED FLEX RIBBON

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	S.C.	2/27/20	A	55335	ZFS-COB31-24 MULTI

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	2/27/20			1 OF 1