
SHALLOW BOX CUTTABLE LED FLEX SHEET


FEATURES

24 VDC
36 WATTS
50 Lensed LEDS per sheet
SHEET SIZE: 18.9” x 9.4”
>90 CRI
IP20 Water Resistance
3M Adhesive Backing

Each LED is 0.72 Watts
Cut Flexible LED circuit to desired shape



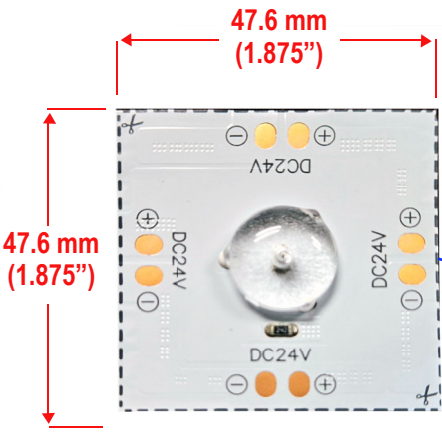


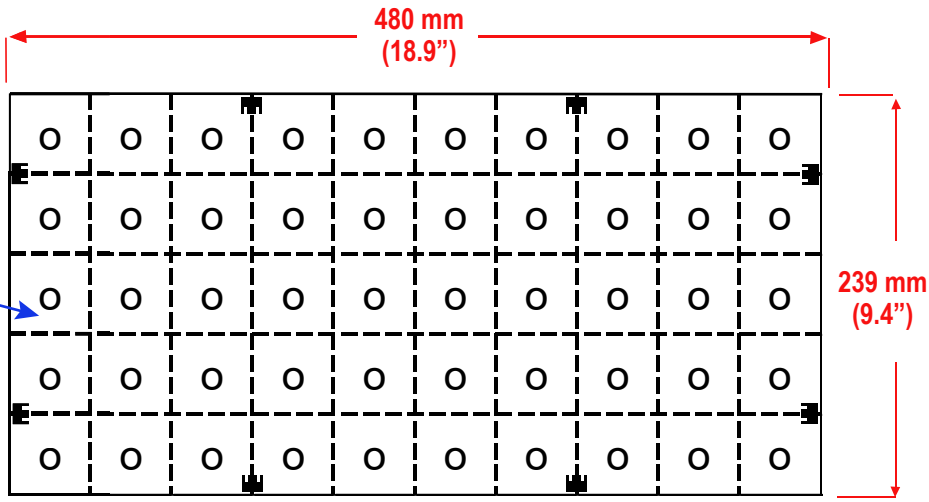

OPTIONAL ACCESSORIES:



ZFSS-288-J Joiner Connector

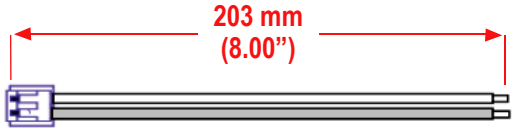

ZFSS-288-I Input Connector

Absolute Maximum Rating at (Ta=25° C)

Parameter	Symbol	Abs Max Rating
Forward Current	IF	1.5 A
Power Dissipation	PD	36 W
Operating Temperature	Topr	-20~+60°C
Storage Temperature	Tstg	-30~+70°C

Electro-Optical Characteristics (Ta=25° C)

JKL Part Number	Color	LED Count	Input Voltage	Wattage (W)	Radiance Angle	CCT Kelvin	Lumens Flux (lm)	Max Series Connection
ZFSL-50-CW	Cool White	50	24VDC	36	160°	6250° K	3200	4 full sheets
ZFSL-50-WW	Warm White	50	24VDC	36	160°	3100° K	3050	4 full sheets

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
	Released	3/20/24

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN mm (INCHES)
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- REF.
2 PL +/- REF.
ANGLE +/-

JKL COMPONENTS CORPORATION

TITLE: LENSED CUTTABLE LED FLEX SHEET

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
S Newton	JV	3/20/24	A	55335	ZFSL-50

SCALE	RELEASED DATE	REVISION	REV. NO.	SHEET
NONE	3/20/24			1 OF 1