Features

ALUMILINE® SLIM LED FIXTURE


- Long Life
- RoHS Compliant
- No UV Emission
- Low Profile
- Protected against Dust and Splashing Water
- Mounting Holes for Ease of Installation
- Available in Multiple LED Spacing
- Custom Connectors Available

A DIM.	B DIM. (pitch)	POWER	CURRENT	LUMEN
±1.2mm (±.05 inch)	mm (inch)	(W)	(mA)	Flux (lm)
310 (12.20)	10 (.40)	1.4	60	160
610 (24.00)	10 (.40)	2.9	120	320
910 (35.83)	10 (.40)	4.3	180	480
1210 (47.67)	10 (.40)	5.8	240	640
310 (12.20)	16.7 (.66)	0.9	36	95
610 (24.00)	16.7 (.66)	1.7	72	190
910 (35.83)	16.7 (.66)	2.6	108	285
1210 (47.67)	16.7 (.66)	3.5	144	385
310 (12.20)	25 (.98)	0.6	24	65
610 (24.00)	25 (.98)	1.2	48	130
910 (35.83)	25 (.98)	1.7	72	190
1210 (47.67)	25 (.98)	2.3	96	255



Accessories

ZPS-2435 24V, 35 Watt Power Supply
ZPS-2460 24V, 60 Watt Power Supply
ZDM-01 PWM LED Dimmer
Note: ZPS-2435 and ZPS-2460 require use of wire nuts for connections.

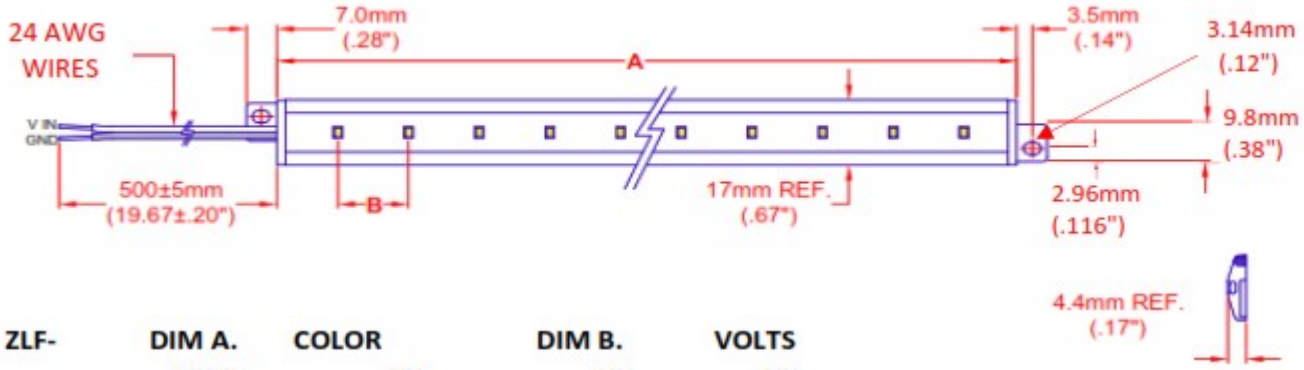

ZLF-	DIM A.	COLOR	DIM B.	VOLTS
	XXXX-	XX-	XX-	XX
	0310	W1=3500°K		
	0610	W3=5700°K	10=10mm	12
	0910	W5=6500°K	16=16.7mm	24
	1210	W6=7500°K	25=25mm	

Notes

1. Please contact JKL if you prefer this product supplied with a connector.
2. Please refer to JKL Application Sheet: JKL-AS-ZLF-ALUMILINE-SLIM for Installation and Power Recommendations.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
D	ADD TAB DIM AND CH OPTO CH	9/21/21
C	ADDED MAX. RATINGS	7/21/17
B	ADD NOTES	8/15/11
A	ADD WIRE TYPE AND SIZE	6/27/11
	RELEASED	12/23/09

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE MILLIMETER (INCH)
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- REF.
2 PL +/- REF.
ANGLE +/- REF.

JKL COMPONENTS CORPORATION

TITLE: ALUMILINE® SLIM LED FIXTURE

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	SN	9/21/21	A	55335	ZLF-MULTI

MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	12/23/09	9/21/21	D	1 OF 1