
170° WIDE BEAM HIGH-OUTPUT LED CHANNEL for SMALL/MEDIUM CHANNEL LETTERS and SIGN BOXES

FEATURES
12VDC
IP67
50,000 Life Hours/5 Year Warranty
110 lm/W High Efficacy
Operating Temperature -20°C to +70°C
170° Wide Beam
50 Modules per Strand



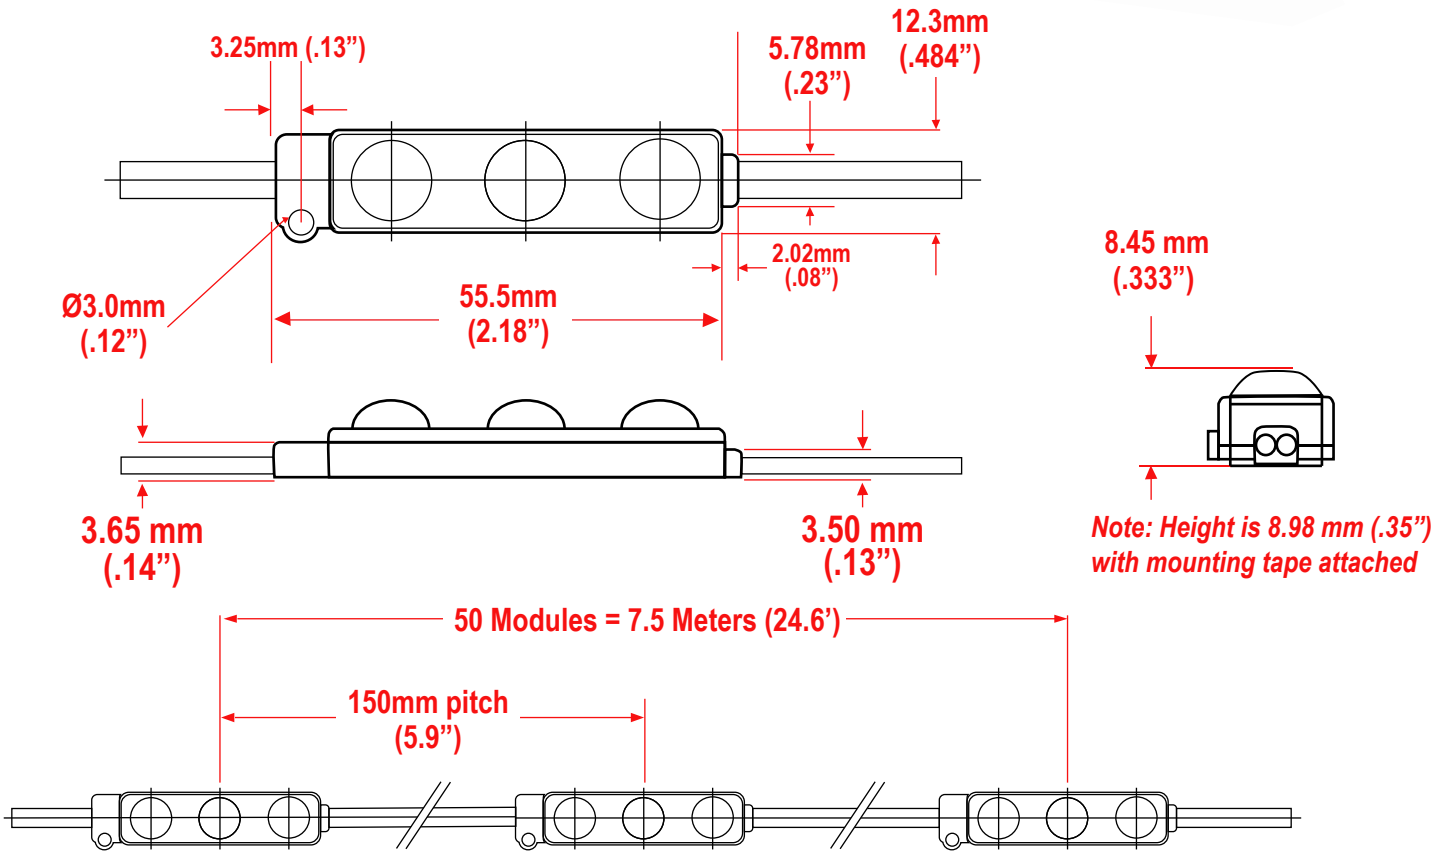

NOTES:
Mounting can be accomplished with double sided tape that is on the backside of modules. Screw holes are also present. Wire with Red Stripe is Positive Input.
Use no more than 50 modules in series.
Take care to prevent exposed wire on the ends.

c UL us
E339601

JKL Part Number	Input Voltage	Power per Module	CCT	Beam Angle	CRI	Lumen Flux per Module	Lumen Efficacy	No. Modules Per Pack
ZM-333-WW	12V DC	0.66W	3000° K	170°	Ra80	66 lm	110 lm/W	50 pc/24.6' (7.5 Meters)

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
	Released	5/10/23

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN mm (INCHES)
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- REF.
2 PL +/- REF.
ANGLE +/-

JKL COMPONENTS CORPORATION

TITLE: WIDE BEAM WARM WHITE LED CHANNEL MODULE

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
S Newton	JV	5/10/23	A	55335	ZM-333-WW

SCALE	RELEASED DATE	REVISION	REV. NO.	SHEET
NONE	5/10/23			1 OF 1