


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	2/15/06
A	CHANGE WIRE LENGTHS	3/7/06

JKL PART NUMBER: BF22180-28B/ASSY/01

JKL LAMP PART NUMBER	COLOR	CIRCUIT VOLTAGE VS (Vrms)	STARTING VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS)
BF22180-28B	RGB WHITE	x = .346 y = .319	1140 @ 0°C	380	5 ± 1	38,000 ± 10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

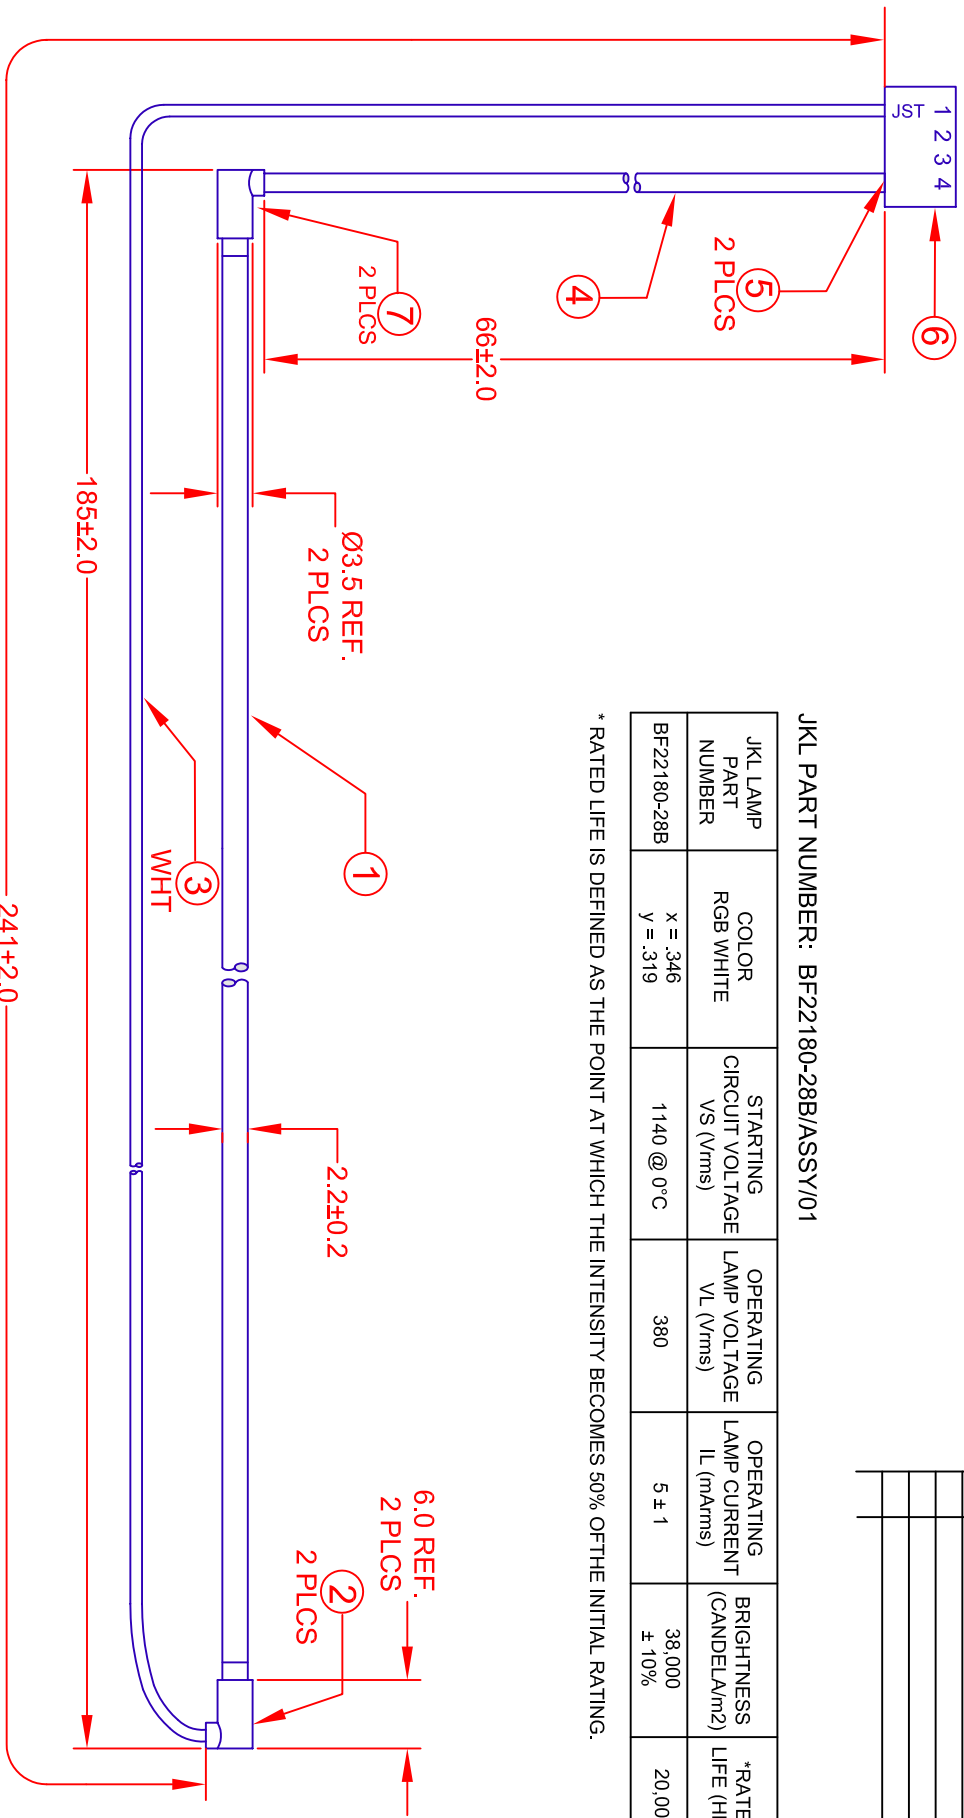

ITEM QTY	PART NUMBER	DESCRIPTION
1	BF22180-28B	CCFL, 2.2mm X 180mm
2	BF2.4/RC	END CAP, 2.4mm
3	RM-MIL-W-16878-WHI	WIRE, 28 AWG, WHITE
4	RM-UL3239-24-PNK	WIRE, 24 AWG PINK
5	RM-SEH-001T-P0.6	CRIMP TERMINAL
6	RM-EHR-4	CONN, 4 POS
7	RM-SN60PB40	SOLDER

<p>METRIC THIRD ANGLE PROJECTION</p>	<p>DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/-</p>	<p>JKL COMPONENTS CORPORATION</p> <p>TITLE CCFL LAMP ASSEMBLY</p>
	<p>DRAWN BY L. WENGSTROM APP'D BY L.W. DATE 3/7/06</p>	
<p>SCALE NONE</p>	<p>SIZE A</p>	<p>FSCM NO. 55335</p>
<p>MANUAL REVISIONS NOT PERMITTED</p>	<p>RELEASED DATE 2/15/06</p>	<p>DRAWING NO. BF22180-28B/ASSY/01</p>
	<p>REVISION DATE 3/7/06</p>	<p>REV. NO. A</p>
		<p>SHEET 1 OF 1</p>