



Alumiline®

Dimming Display KIT - 19"



KIT INCLUDES:

- | | |
|---|------------|
| 1 - Alumiline® LED Light Strip 19" | ZAF-486-24 |
| 2 - Alumiline® Mounting Clips | ZAF-20C |
| 1 - Alumiline® Input Connector | ZAF-CH-S |
| 1 - Power Supply (18W 24V) | ZPS-2418 |
| 1 - Dimmer | ZDM-01 |
| 1 - Input/output connector set for dimmer | |

**WARM
WHITE**


Warm White Kit
AKZWF-01WW

**NEUTRAL
WHITE**

Neutral White Kit
AKZAF-01NW

**COOL
WHITE**


Cool White Kit
AKZAF-01CW



DIMMER



POWER SUPPLY

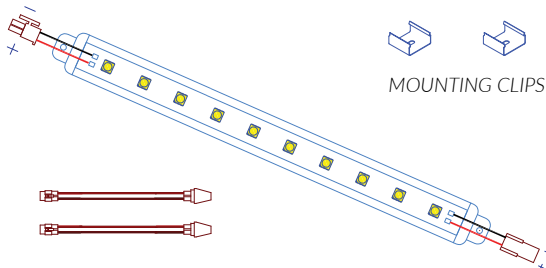

MOUNTING CLIPS

1 ALUMILINE STRIP - 19"



INPUT CONNECTOR

DIMMER CONNECTORS

ALUMILINE®





This Alumiline® kit offers a quick and easy way to light a shelf or display cabinet, and includes a dimmer for variable illumination. Easy to install, it is the ideal enhancement for living rooms, office areas and libraries. This kit is available in Warm, Neutral or Cool White.

INSTALLATION

The LED strips are mounted underneath the shelf edge to provide illumination below. Connectors and clips are included in this kit for versatility. Attach *mounting clips* to the surface with screws above the area you'd like to illuminate. Insert strips. Connect the strips to the dimmer, which can be utilized as an on-off switch for the system.

The Alumiline® LED system operates on 24VDC. Connect the dimmer to the power supply by inserting the barrel of the power supply into the connector provided with the dimmer. Plug the power supply into the wall and turn on the Alumiline!

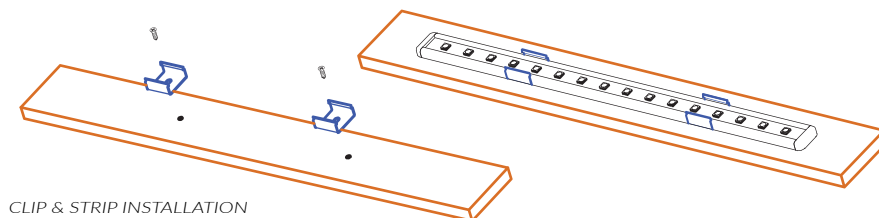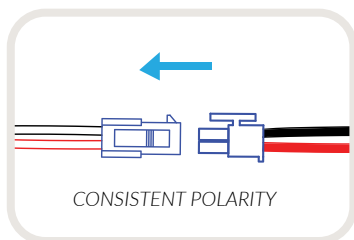

WWW.ALUMILINELED.COM
SALES@JKLLAMPS.COM
800-421-7244

JKL®
COMPONENTS
CORPORATION