

JKL COMPONENTS CORPORATION


3 FOOT 24V WHITE LED FLEX RIBBON WITH BARREL CONNECTOR

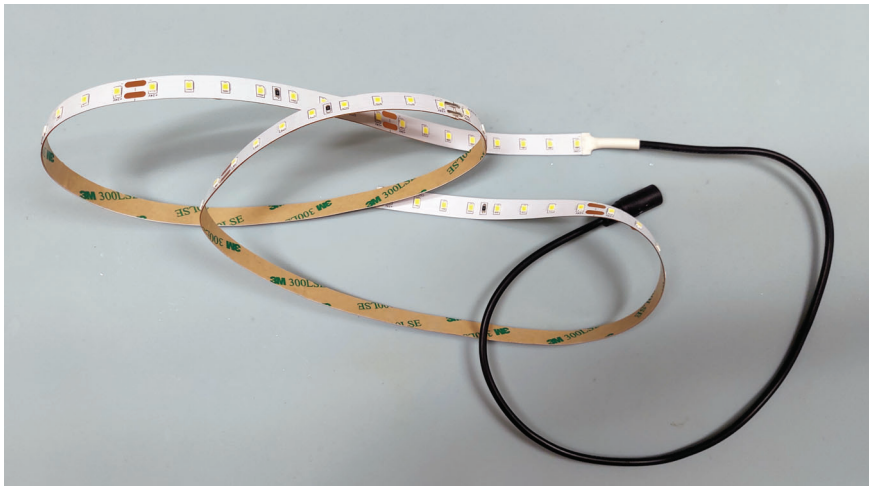

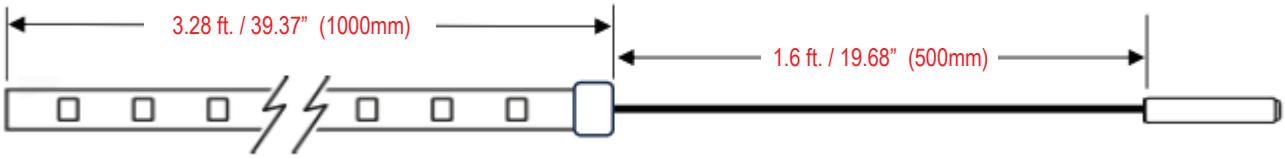

80 LEDs per 3.28 foot (1 Meter) Strand

8 LEDs per 3.94" (100mm) Segment

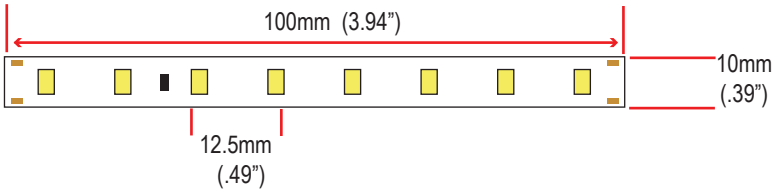

JKL Part Number	COLOR	NUMBER OF LEDS	INPUT VOLTAGE	POWER	CURRENT	RADIANCE ANGLE	COLOR TEMP.	LUMEN FLUX
ZFS-105000-24CW/ASSY1M	Cool White	80	24VDC	12W	0.5 A	120°	6250°K	1920 lm
ZFS-105000-24NW/ASSY1M	Neutral White	80	24VDC	12W	0.5 A	120	4250°K	1824 lm
ZFS-105000-24WW/ASSY1M	Warm White	80	24VDC	12W	0.5 A	120°	3050°K	1705 lm

FEATURES

MOUNTING: Easy Peel and Stick Mounting - 3M Adhesive Tape

LENGTH: 3.28 foot piece can be cut with scissors every 4" for a shorter length

POWER: 24V Flexible LED Ribbon includes standard barrel connector (2.1mm x 5.5mm)
Compatible with standard 24V wall power supplies with mating barrel connector

NOTES

LENGTH: 16 foot reels with bare wire leads are available for production requirements.

POWER SUPPLY SELECTION: Each 3.28 foot strand is 12 Watts. Select a power supply that is 15 Watts or more to power a single 3.28 ft. strand.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
	RELEASED	11/1/25

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0.20
ANGLE +/- 0

DRAWN BY S. VELAS | APPV'D BY S.N. | DATE 11/1/25

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
24V LED FLEX RIBBON WITH BARREL CONNECTOR

SIZE	FSCM NO.	DRAWING NO.
A	55335	ZFS-105000-24/ASSY/1M_MULTI

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	11/1/25			1 OF 1